



UR-12

Master-IT USB - Advanced USB KVM switch

Installation Guide

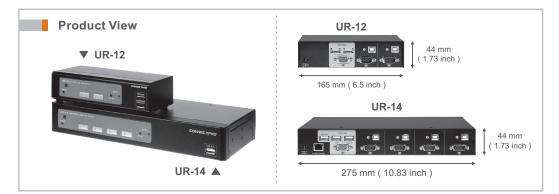

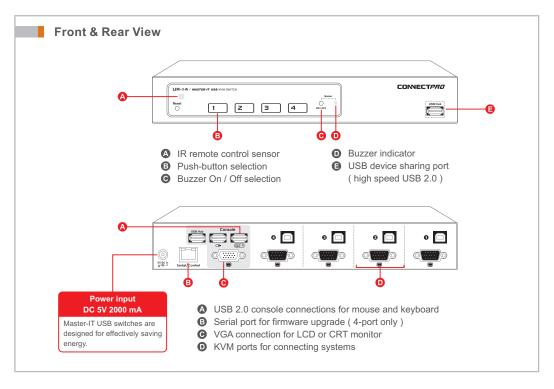

Connect Cables

1



Connect Power Adaptor

Connect console

- 1. Monitor
- Mouse
 Keyboard

Connect KVM cable from computer system to KVM ports

Port Selection



Press button to select port for control



Use IR remote controller for selecting port (optional)

Ordering Information

| Model | Description | | | |
|---------------------------|--|--|--|--|
| UR-12 | 2-port USB VGA KVM Switch | | | |
| UR-14 | 4-port USB VGA KVM Switch | | | |
| Optional part / accessory | | | | |
| Cables | | | | |
| SPU-06 | 6-ft USB KVM cable | | | |
| SPU-10 | 10-ft USB KVM cable | | | |
| SPU-15 | 15-ft USB KVM cable, special length of KVM cables are available (25-ft, 50-ft, 75-ft and 100-ft) | | | |
| Power Adaptor | | | | |
| 3A-111WX05 | Power supply DC 5V (2000 mA) - AC 110/220V for USA | | | |
| | * Any other interface is available upon request | | | |
| IR Remote Controller | | | | |
| RC-01 | IR remote controller for 2-port & 4-port KVM Switch | | | |
| Rack Mounting Kit | | | | |
| RMK-1901 | 19" rack mounting bracket set & cable support bar for 4-port KVM Switch | | | |

Features & Benefits

- Compatible with Windows (Windows 98, 2000, XP, Vista, 7), Linux and Mac OS
- Backlit push-button with multi-color LED for easy monitoring and selection
- Buzzer sound for computer switching confirmation
- Plug-and-Play system configuration
- Additional front USB ports for device sharing
- No drivers needed for keyboard and mouse operation
- High compatible with HID devices
- 400 MHz bandwidth for higher resolution display
- Support All-time Full DDC (Active DDC to all systems connected)
- 3-year Warranty

Specification

| | | UR-12 | UR-14 | | |
|-------------------------------|------------------|--|---|--|--|
| Functional | | | | | |
| Computer port number | | 2 | 4 | | |
| Panel button control | | 2 | 4 | | |
| Front panel indication | | PC On-Line - Green , Selected - Red , Both - Yellow | | | |
| IR remote control | | Yes (Built-in receiver, controller RC-01 optional) | | | |
| Hot plug-and-play | | Yes | | | |
| Beep sound | | On / Off (Front Panel Select Button) | | | |
| Cable length (Max) | | 5M (15ft) for USB ; 30M (100ft) for VGA | | | |
| VGA resolution | | Max 2048 x 1536 , 400 MHz , DDC1 / DDC2B | | | |
| System connectors | Keyboard & Mouse | USB B x 2 | USB B x 4 | | |
| | Monitor | HDB-15 Male x 2 | HDB-15 Male x 4 | | |
| Console connectors | Keyboard & Mouse | USB A x 2 | USBAx2 | | |
| | Monitor | HDB-15 Female x 1 | HDB-15 Female x 1 | | |
| Total USB device sharing port | | USB A (USB 2.0) x 4 | | | |
| Mechanical | | | | | |
| Dimensions H x W x D | | 44 x 165 x 76 mm (1.73 x 6.5 x 2.99 inch) | 44 x 275 x 131 mm (1.73 x 10.83 x 5.16 inch) | | |
| Weight | | 530 g (1.17 lb) | 1150 g (2.54 lb) | | |
| Power | | | | | |
| Operating voltage | | DC 5V (2000 mA) | | | |
| Power frequency | | 50-60 Hz | | | |
| Certification | | | | | |
| | | FCC, CE | | | |

Limited Warranty For ConnectPRO KVM Switches

ConnectPRO offers a 3-year limited warranty for all of its KVM Switches and KVM Switch modules. ConnectPRO stands behind its products assured that you're purchasing a proven technology with quality and reliability.



ConnectPRO - USA, Taiwan www.connectpro.com

Corporate Office

20525 Paseo Del Prado Walnut, CA 91789, USA Tel +1-909-444-9288 Fax +1-909-444-9289

Design Center and Operational Hub

YF., No.122, Sec. 1, Sanmin Rd., Banciao City, Taipei County 220, Taiwan, R.O.C. Tel. +886-2-8964-2700 Fax +886-2-8964-2977